

FIG. 1



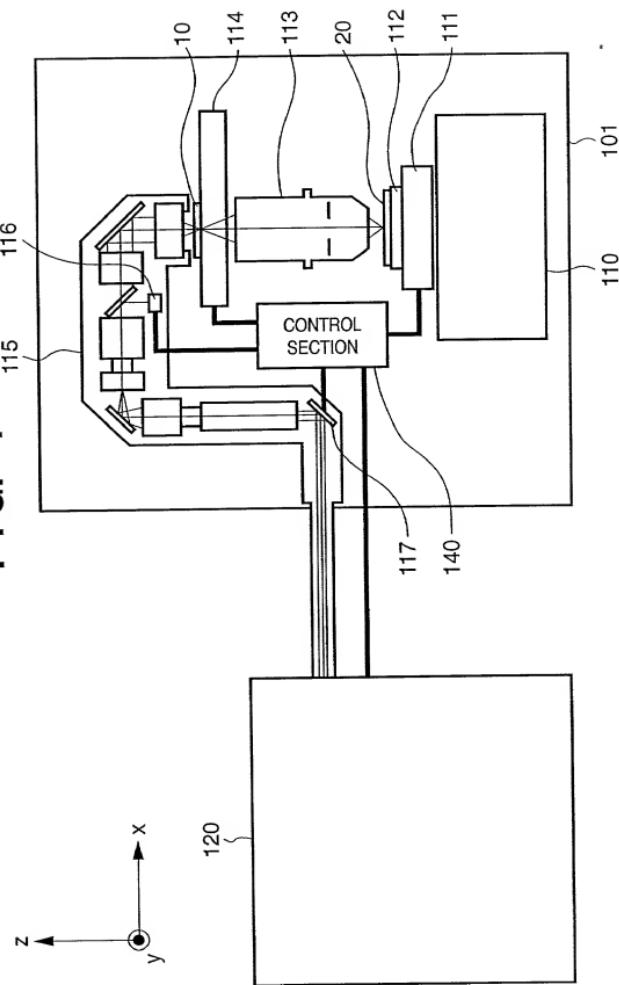


FIG. 2

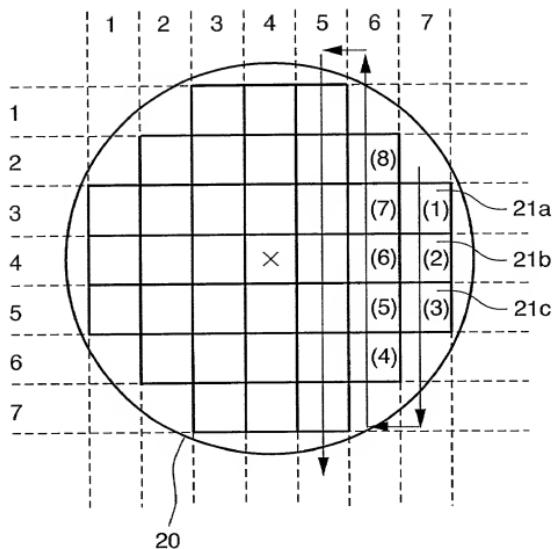

00000000000000000000000000000000

FIG. 3

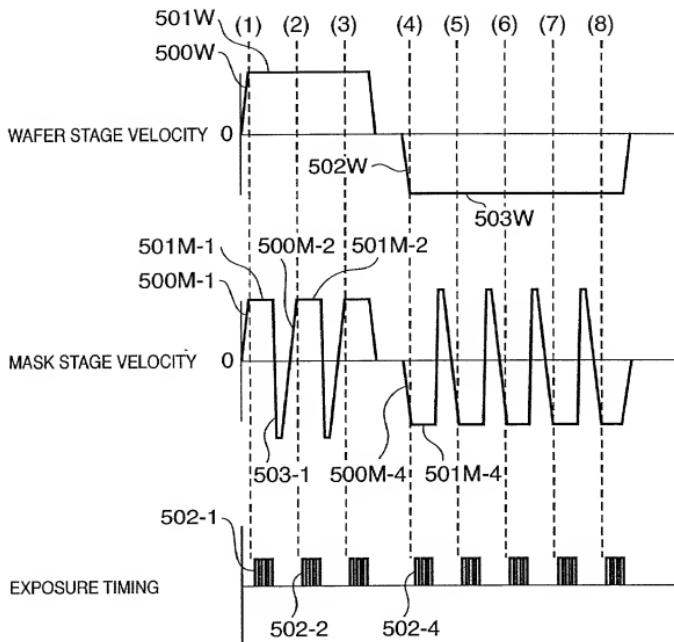

09660594.092401

FIG. 4

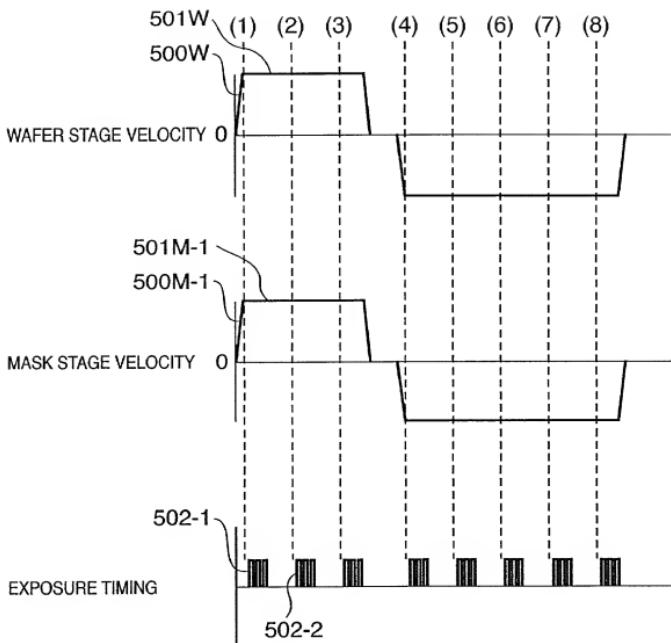


FIG. 5

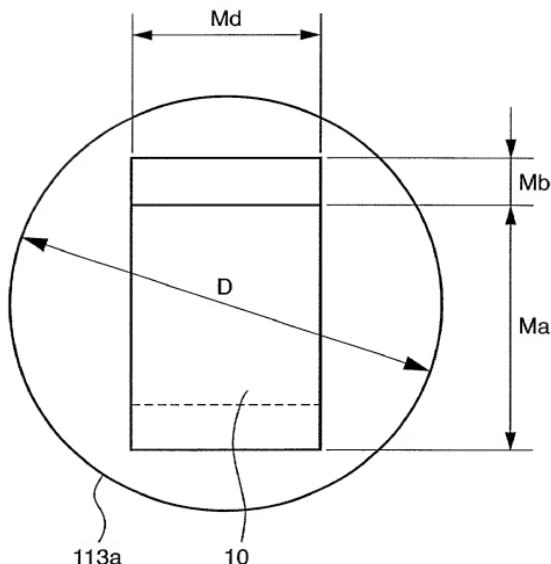


FIG. 6

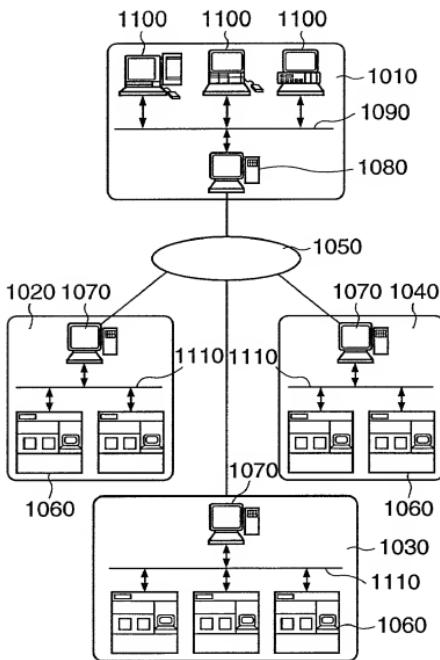


FIG. 7

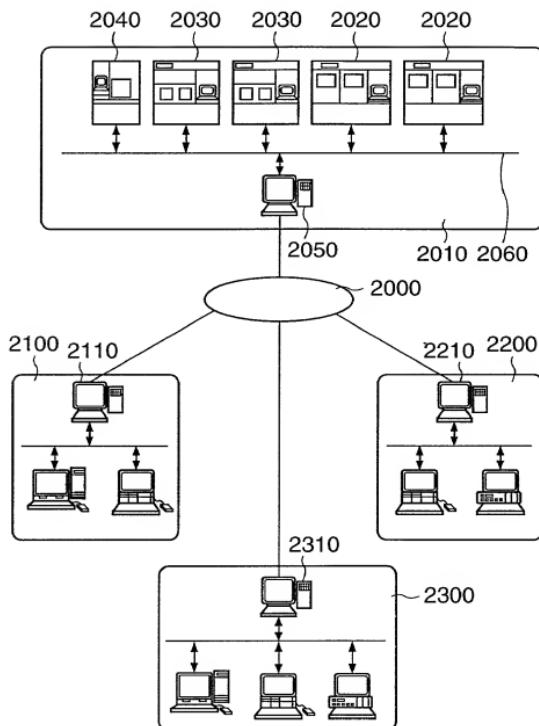


FIG. 8

URL <http://www.maintain.co.jp/db/input.html>

TROUBLE DB INPUT SCREEN

DATE OF OCCURRENCE [2000/3/15] ~ 4040

MODEL [*****] ~ 4010

CASE [OPERATION DEFECT (RISING ERROR)] ~ 4030

DEVICE S/N [465NS4580001] ~ 4020

EMERGENCY DEGREE [D] ~ 4050

SYMPTOM [LED CONTINUES BLINKING AFTER
POWERING ON] ~ 4060

REMEDY [REENTER POWER
(PRESS RED BUTTON AT STARTUP)] ~ 4070

PROGRESS [PROVISIONALLY REMEDIED] ~ 4080

[SEND] 4100 [RESET] 4110 4120

LINK TO RESULT LIST DATABASE SOFTWARE LIBRARY OPERATING GUIDE

FIG. 9

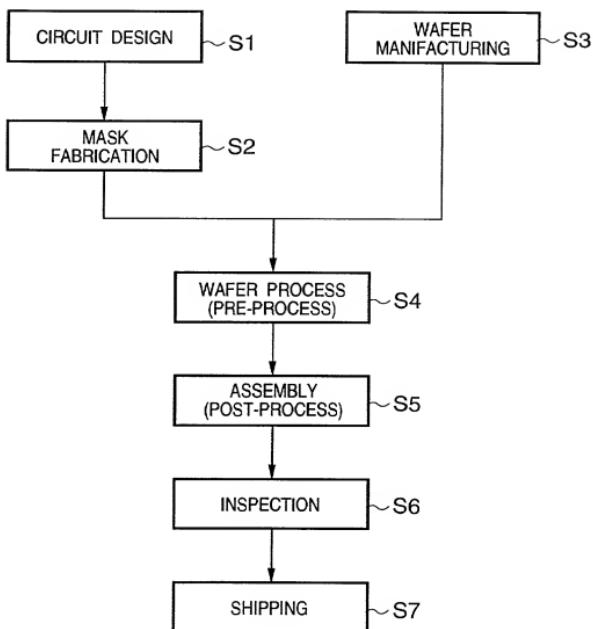


FIG. 10

